

**Optional Electrical Interfaces**


Available for Models

**P100, P117, P119, J205, P605, J705 and W117**



**T**

Standard solder type terminals also accept AMP 60789-2 and 60598-4 Pin Receptacles



**TS**

Three flat bar terminals with #6-32 pan head screws at right angle



**TB**

3 standard 1/4" terminals accept arc-less (or equal) female quick connect terminals



**DN**

DIN Male Plug "F" Set Only Except "C", "K" & "F" Set on P605 Series Units

DN Pin-out:


- 1 = Common
- 2 = N/C
- 3 = N/O
- Other Pin-outs on request

**For L and U Electrical Interfaces**

2 or 3 wire pigtail furnished in 12" length Standard-supplied #20 AWG Insulated with polyvinyl chloride – 300 volts.


COLOR CODE:

- Black – Common
- White – N.O.
- Red – N.C.

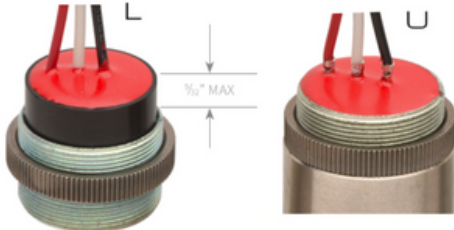

**"M" Interface Quick-Disconnect 3-Pin Connector**

This interface is rated as environmentally resisting. It is intended for use where the connector will be subjected to heavy condensation and rapid changes in environmental temperature or pressure. This connector is equivalent to MS3102E-10SL-3P. Applicable to models shown below only.

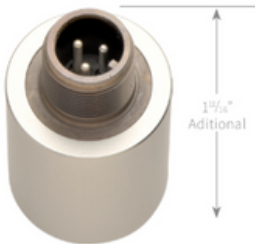

**"M" Interface**

P117, J705, J205, P605 "F" Set Only Except "C" "K" and "F" Set on P605



**MS3106E**

Connectors – All Models With "M" Interface


**Interface Options**

Optional Electrical Interfaces Available for Model P88



**TB**

1/4" (TB) Blade terminals UL Recognized CSA Listed



**TS**

Screw Terminal UL Listed (except 25 amp) CSA Listed